




8042 TELESTEP telescopic ladder

- › Can be used as length adjustable leaning ladder, freestanding ladder and stairway ladder.
- › Stable adaptation to uneven floor surfaces or stairs possible.
- › Rungs made of extruded profiles with deep ribbing, and therefore increased slip resistance.
- › Low space requirements for storage and transport.
- › Solid locking device handles made from high-quality aluminium castings.
- › Ergonomic and service-friendly bolted hinges.
- › In the freestanding ladder position, the ladder can be folded together to move it without first having to release the hinge.

Note:
Hinges must be kept clean and regularly lubricated.

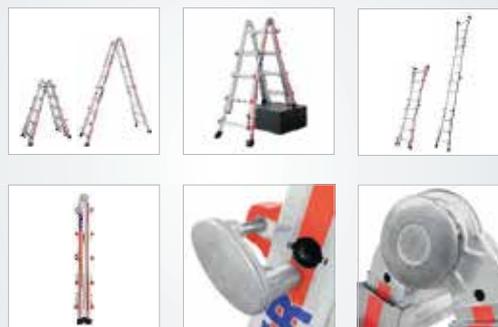

Special advantages of TELESTEP 8042:



The grip discs on the side of the pin joints are ergonomically shaped and ensure easy handling when adjusting the ladder.



To release the joints simply pull the grip discs on the pin joint outwards and place the ladder in the leaning or freestanding ladder position.



The joints engage automatically when the required position is reached. In freestanding ladders position, the ladder can still be closed without re-opening the joints.



The solid locking devices made of cast aluminium for adjusting ladder height are easy to handle and extremely durable.

Number of rungs		4x3	4x4	4x5	4x6
Stile	approx. mm	60	60	60	60
Number of rungs	at max. extension	10	14	18	22
Length leaning ladder	approx. m	1.85 – 2.92	2.35 – 4.02	2.90 – 5.14	3.46 – 6.26
Standing height step ladder	approx. m	0.72	1.26	1.80	2.35
Working height step ladder	approx. m	2.22	2.76	3.30	3.85
Reach height step ladder	approx. m	2.72	3.26	3.80	4.35
Standing height leaning ladder	approx. m	2.10	3.00	4.10	5.20
Working height leaning ladder	approx. m	3.60	4.50	5.60	6.70
Reach height leaning ladder	approx. m	4.10	5.00	6.10	7.20
Vertical height step ladder	approx. m	0.90 – 1.40	1.15 – 1.95	1.40 – 2.49	1.70 – 3.03
Width as step ladder top/bottom	approx. mm	355/555	355/560	355/630	355/700
Folded LxWxH	approx. m	1.00x0.55x0.20	1.20x0.55x0.20	1.50x0.65x0.20	1.80x0.70x0.20
Base width retracted/extended	approx. m	0.73/1.08	0.90/1.44	1.07/1.80	1.26/2.15
Weight	approx. kg	11.2	13.2	16.0	20.0
EAN-Code		4019502337800	4019502337817	4019502337824	4019502337831
Order no.		804212	804216	804220	804224

For an explanation of working/standing/reach height see on page 5.

Recommended accessories:



P. 176

Folding universal ladder step



P. 182

Bucket hook for rung ladders



P. 182

Tool bag for aluminium ladders



P. 175

Foot extension for telescopic ladders



P. 174

Set of swivelling foot pikes for telescopic ladders



P. 180

Fixed castor set for telescopic ladders

Spare part:

- › Spare parts set rung covers, order no. 0054047, see on page 186.