


8576

NEW


Mobile stairway tower with stabiliser

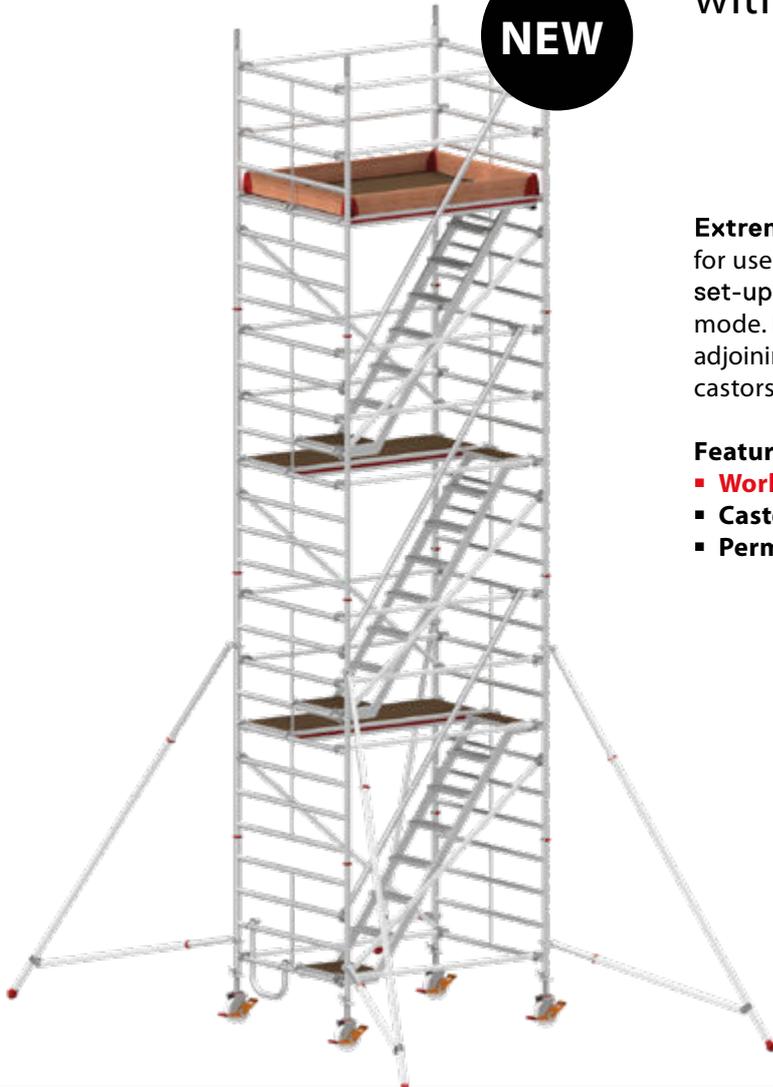

Extreme flexibility and particularly safe ascent: ready for use anytime and anywhere thanks to the optional set-up with height offset, for example, in stairway mode. Features spacious work surface consisting of two adjoining platforms and four height-adjustable swivel castors. Safe ascent thanks to internal stairs.

Features:

- **Work platform: 1.90 × 1.30 m**
- **Castors: Ø 200 mm**
- **Permissible load: 150 kg/m² (1.5 kN/m²)**

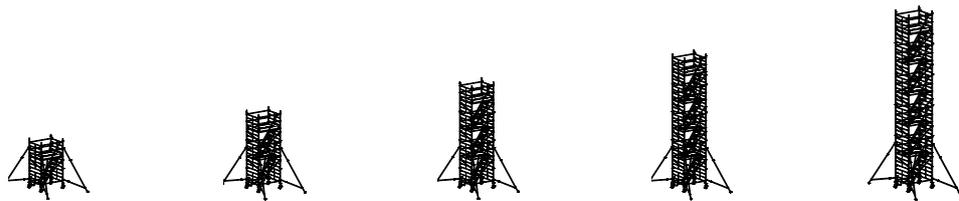

Reach height (approx. m)	4.40	6.40	8.40	10.40	12.40
Tower height (approx. m)	3.64	5.64	7.64	9.64	11.64
Standing height (approx. m)	2.40	4.40	6.40	8.40	10.40
Platform length (approx. m)	1.90	1.90	1.90	1.90	1.90
Frame section width (approx. m)	1.50	1.50	1.50	1.50	1.50
Ballasting					
Indoor, centre (kg)	0	0	0	0	0
Indoor, on wall (kg)	0	20 ⁽¹⁾	30 ⁽¹⁾	50 ⁽¹⁾	70 ⁽¹⁾
Outdoor, centre (kg)	0	0	not permitted	not permitted	not permitted
Outdoor, on the wall (kg)	20 ⁽¹⁾	60 ⁽¹⁾	not permitted	not permitted	not permitted
Order no.	857604	857606	857608	857610	857612

⁽¹⁾Ballasting is not required when using two wall connectors (607141) for pressure support.
 Required additional parts from page 23.
 Individual parts and parts list can be found in the instructions for assembly and use on page 67. | [Click here.](#)