


ACCES LADDER

Aluminum ladders to fix.
Useful for accessing mezzanine or similar, or working from the platform.

REGULATIONS IN 14,122

- ✓ Maximum working height approximate (mts): 5
- ✓ Extruded profiles.
- ✓ Supplied with anchors lower and upper to be installed.
- ✓ Optional second railing.

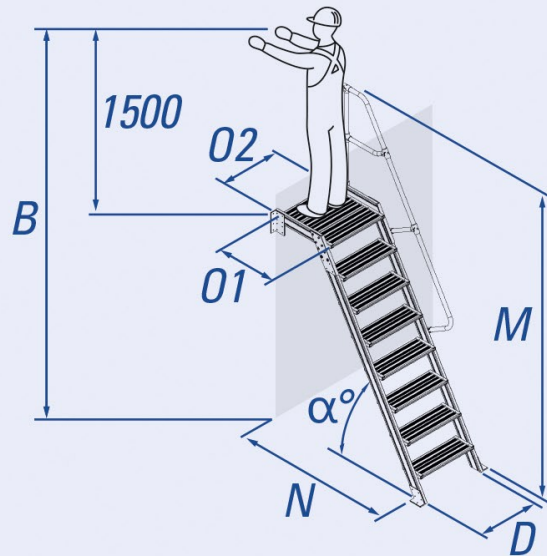

Acces Ladder 60°

Model	Rungs	Weight	Width (D)	Opening (N)	Platform Height	Working Height (B)	Total Height (M)	Platform (O1/O2)
1020003	3	14	0,65	0,96	0,71	2,21	1,72	0,60 x 0,60
1020004	4	16	0,65	1,11	0,96	2,46	1,97	0,60 x 0,60
1020005	5	18	0,65	1,25	1,21	2,71	2,22	0,60 x 0,60
1020006	6	19	0,65	1,39	1,46	2,96	2,47	0,60 x 0,60
1020007	7	22	0,65	1,54	1,71	3,21	2,72	0,60 x 0,60
1020008	8	24	0,65	1,68	1,96	3,41	2,97	0,60 x 0,60
1020010	10	28	0,65	1,97	2,46	3,96	3,47	0,60 x 0,60
1020012	12	33	0,65	2,26	2,96	4,46	3,97	0,60 x 0,60

SIZES EXPRESSED IN METERS

STANDARD SIZES (mm) / Acces Ladder 60° Step depth: 200 Separation between steps: 250

Acces Ladder 45°

Model	Rungs	Weight	Width (D)	Opening (N)	Platform Height	Working Height (B)	Total Height (M)	Platform (O1/O2)
1020503	3	21	0,65	1,21	0,58	2,08	1,58	0,60 x 0,60
1020504	4	23	0,65	1,41	0,78	2,28	1,79	0,60 x 0,60
1020505	5	25	0,65	1,62	0,99	2,49	1,99	0,60 x 0,60
1020506	6	27	0,65	1,75	1,19	2,69	2,20	0,60 x 0,60
1020507	7	28	0,65	1,96	1,40	2,90	2,40	0,60 x 0,60
1020508	8	30	0,65	2,16	1,60	3,10	2,61	0,60 x 0,60
1020510	10	38	0,65	2,57	2,05	3,55	3,02	0,60 x 0,60
1020512	12	41	0,65	2,98	2,46	3,96	3,43	0,60 x 0,60

SIZES EXPRESSED IN METERS

STANDARD SIZES (mm) / Acces Ladder 45° Step depth: 200 Separation between steps: 250

