




## 6051 Rope-operated extension ladder, two-section

- › Inner width of the ladder 300 mm (upper section).
- › Inside fittings\* ensure better guidance and high stability: The stile can be held on the outside when extending and retracting the ladder without the risk of crushing one's fingers.
- › Rungs made of extruded profiles with deep ribbing, and therefore increased slip resistance.
- › Folding feet with large bearing surface and high stability.
- › Maximum grip rope (Ø 12 mm), for safe height adjustment.
- › With high-quality plastic wall rollers.

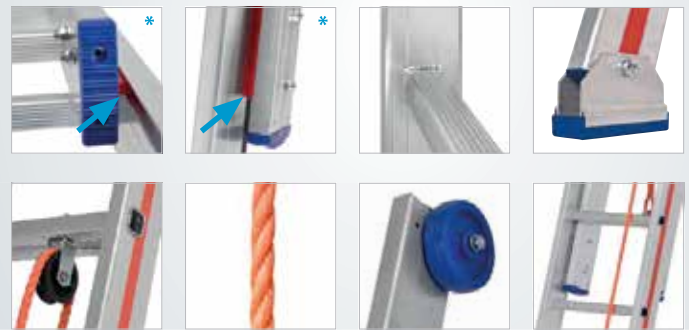

Number of rungs		2×14	2×16	2×18	2×20	2×22
Stile	approx. mm	89	89	89	100	100
Number of rungs	at max. extension	25	29	32	36	40
Length	retracted approx. m	4.18	4.74	5.30	5.86	6.42
Length	extended approx. m	7.26	8.38	9.24	10.34	11.46
Standing height	approx. m	5.97	7.05	7.87	8.95	10.03
Working height	approx. m	7.47	8.55	9.37	10.45	11.53
Reach height	approx. m	7.97	9.05	9.87	10.95	12.03
Width	extended top/bottom approx. mm	355/425	355/425	355/425	355/425	355/425
Weight	approx. kg	19.7	24.8	28.2	33.0	38.1
EAN-Code		4019502338630	4019502338647	4019502338654	4019502338661	4019502338678
Order no.		605128	605132	605136	605140	605144

For an explanation of working/standing/reach height see on page 5.

### Recommended accessories:



P. 176

Cross-beam  
for ladder section



P. 174

Set of foot pikes  
for stiles



P. 178

Telescopic wall spacer  
for rung ladders



P. 178

Ladder holder set  
for gutters



P. 182

Ladder bracket set  
for roof racks