




Note:
Middle section must be extended at least two rungs before the ladder is fully extended.



6261 Rope-operated extension ladder, three-section

- › Inner width of the ladder 300 mm (upper section).
- › Inside fittings* ensure better guidance and high stability: The stile can be held on the outside when extending and retracting the ladder without the risk of crushing one's fingers.
- › Rungs made of extruded profiles with deep ribbing, and therefore increased slip resistance.
- › Folding feet with large bearing surface and high stability.
- › Maximum grip ropes in different colours to distinguish: upper section: Ø 10 mm, colour blue; middle section: Ø 12 mm, colour orange.
- › With high-quality plastic wall rollers.

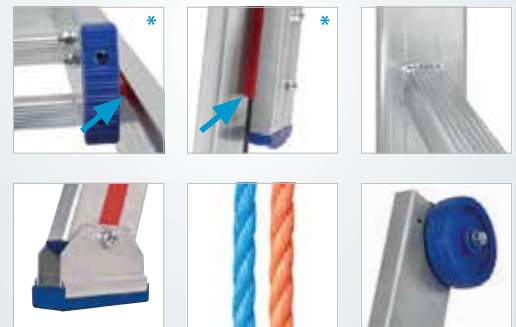

Number of rungs		3×14	3×16	3×18
Stile	approx. mm	89	100	100
Number of rungs at max. extension		34	40	43
Length retracted	approx. m	4.19	4.75	5.30
Length extended	approx. m	9.80	11.46	12.30
Standing height	approx. m	8.43	10.06	10.84
Working height	approx. m	9.93	11.56	12.34
Reach height	approx. m	10.43	12.06	12.84
Width extended top/middle/bottom	approx. mm	355/425/490	355/425/490	355/425/490
Weight	approx. kg	35.8	44.0	49.8
EAN-Code		4019502338913	4019502338920	4019502338937
Order no.		626142	626148	626154

For an explanation of working/standing/reach height see on page 5.

Recommended accessories:



P. 176

Cross-beam
for ladder section



P. 174

Set of foot pikes
for stiles



P. 178

Telescopic wall spacer
for rung ladders



P. 178

Ladder holder set
for gutters



P. 182

Ladder bracket set
for roof racks