


Note:
Middle section must be extended at least two rungs before the ladder is fully extended.



4061 Rope-operated extension ladder, three-section

- › Inner width of the ladder 300 mm (upper section).
- › Rolled profile rungs.
- › Ladder feet pressed into the stile.
- › Maximum grip ropes in different colours to distinguish:
upper section: Ø 10 mm, colour orange; middle section: Ø 10 mm, colour blue.
- › With high-quality plastic wall rollers.
- › Guide fittings made of solid steel.

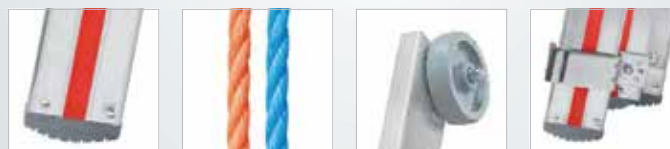

Number of rungs		3×12	3×14	3×16
Stile	approx. mm	83/89	89	89/100
Number of rungs at max. extension		29	34	40
Length retracted	approx. m	3.57	4.13	4.69
Length extended	approx. m	8.33	9.76	11.44
Standing height	approx. m	7.02	8.37	10.00
Working height	approx. m	8.52	9.87	11.50
Reach height	approx. m	9.02	10.37	12.00
Width extended top/middle/bottom	approx. mm	355/425/490	355/425/490	355/425/490
Weight	approx. kg	28.5	33.0	39.0
EAN-Code		4019502339323	4019502339330	4019502339347
Order no.		406136	406142	406148

For an explanation of working/standing/reach height see on page 5.

Recommended accessories:



P. 176

Cross-beam
for ladder section



P. 174

Set of foot pikes
for stiles



P. 178

Telescopic wall spacer
for rung ladders



P. 178

Ladder holder set
for gutters



P. 182

Ladder bracket set
for roof racks