


WORK PLATFORM AND ACCESSES 68°

Aluminum stairs for access and work, fixed or portable, with various possibilities of railings and platform.

Designed to access areas with little space.

REGULATIONS IN 131.1-2

- ✓ Approximate maximum working height (mts): 4.3
- ✓ Extruded profiles. Work ladder with handrails.
- ✓ Second handrail optional.

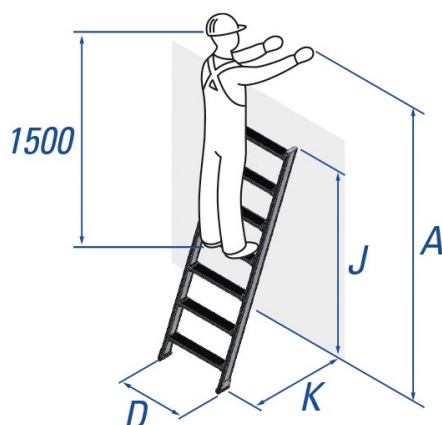

Working scale without railings 68°


Model	Rungs	Weight	Width (D)	Opening (K)	Working Height (A)	Vertical Height (J)
1060304	4	5	0,57	0,54	1,45	0,92
1060305	5	6,8	0,57	0,64	1,68	1,15
1060306	6	8	0,57	0,73	1,91	1,38
1060307	7	9,1	0,57	0,82	2,14	1,61
1060308	8	9,6	0,57	0,92	2,37	1,84
1060310	10	13,2	0,57	1,10	2,83	2,30
1060312	12	17	0,57	1,29	3,29	2,76

Work ladder with railing 68°

Model	Rungs	Weight	Width (D)	Opening (K)	Working Height (A)	Vertical Height (J)
1060004	4	5,4	0,57	0,54	1,45	0,92
1060005	5	7,2	0,57	0,64	1,68	1,15
1060006	6	8,4	0,57	0,73	1,91	1,38
1060007	7	9,7	0,57	0,82	2,14	1,61
1060008	8	10,3	0,57	0,92	2,37	1,84
1060010	10	14,1	0,57	1,10	2,83	2,30
1060012	12	15,7	0,57	1,29	3,29	2,76

SIZES EXPRESSED IN METERS

STANDARD SIZES (mm) / Acces Ladder 68° Step depth: 80 Separation between steps: 230

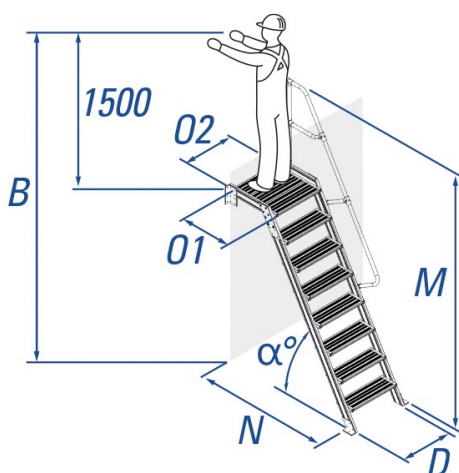

Access ladder with railing 68°

Model	Rungs	Weight	Width (D)	Opening (N)	Working Height (A)	Vertical Height (J)
1060104	4	7,7	0,57	0,54	1,45	0,92
1060105	5	9,4	0,57	0,64	1,68	1,15
1060106	6	10,6	0,57	0,73	1,91	1,38
1060107	7	11,7	0,57	0,82	2,14	1,61
1060108	8	12,3	0,57	0,92	2,37	1,84
1060110	10	15,9	0,57	1,10	2,83	2,30
1060112	12	17	0,57	1,29	3,29	2,76

Acces ladder with platform and railing 68°

Model	Rungs	Weight	Width (D)	Opening (N)	Platform Height	Working Height (B)	Platform (O1/O2)
1060204	4	12,6	0,57	0,76	0,92	2,42	0,50 x 0,40
1060205	5	13,2	0,57	0,86	1,15	2,65	0,50 x 0,40
1060206	6	13,7	0,57	0,95	1,38	2,88	0,50 x 0,40
1060207	7	18,2	0,57	1,04	1,61	3,11	0,50 x 0,40
1060208	8	18,7	0,57	1,13	1,84	3,34	0,50 x 0,40
1060210	10	20,3	0,57	1,32	2,30	3,80	0,50 x 0,40
1060212	12	21,3	0,57	1,51	2,76	4,26	0,50 x 0,40

SIZES EXPRESSED IN METERS

STANDARD SIZES (mm) / Acces Ladder 68° Step depth: 80 Separation between steps: 230



Accessoris obligatoris



Model	Descripció
A18100000	Joc de ganxos 60 mm
A18600000	Juego de separadors
A18700000	Juego de fixació