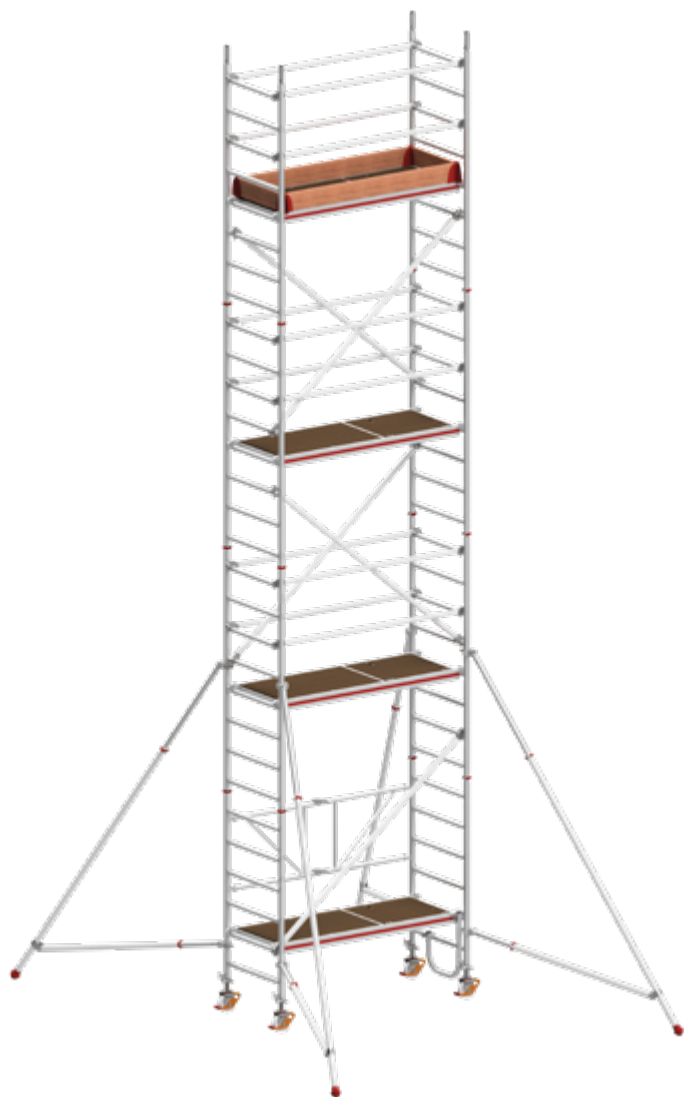


**8177**








## Folding mobile tower with stabiliser



**The new space-saver:** Compact and uses very little space during transport and storage thanks to the folding function. With a spacious platform and from a reach height of 6.75 metres with four height-adjustable castors. Optional assembly with height offset, for example in a stairwell position.

### Features:

- **Work platform: 1.90 x 0.65 m**
- **Castors: Ø 125 mm**
- **Permissible load: 200 kg/m<sup>2</sup> (2.0 kN/m<sup>2</sup>)**

							
Reach height (approx. m)	2.80	3.57	4.57	5.57	6.75	7.75	8.75
Tower height (approx. m)	1.80	2.80	3.80	4.80	5.99	6.99	7.99
Standing height (approx. m)	0.80	1.57	2.57	3.57	4.75	5.75	6.75
Platform length (approx. m)	1.90	1.90	1.90	1.90	1.90	1.90	1.90
Frame section width (approx. m)	0.80	0.80	0.80	0.80	0.80	0.80	0.80
<b>Ballasting</b>							
Indoor, centre (kg)	120	140	0	0	0	0	0
Indoor, on wall (kg)	120	140	40 <sup>(1)</sup>	70 <sup>(1)</sup>	90 <sup>(1)</sup>	120 <sup>(1)</sup>	140 <sup>(1)</sup>
Outdoor, centre (kg)	120	140	0	0	0	0	0
Outdoor, on the wall (kg)	120	140	60 <sup>(1)</sup>	90 <sup>(1)</sup>	140 <sup>(1)</sup>	0 <sup>(2)</sup>	0 <sup>(2)</sup>
Order no.	817703	817704	817705	817706	817707	817708	817709

<sup>(1)</sup> Ballasting is not required when using two wall connectors (607141) for pressure support.

<sup>(2)</sup> Two wall connectors (607141) need to be used for pressure support.

Required additional parts from page 23.

Individual parts and parts list can be found in the instructions for assembly and use on page 67. | [Click here.](#)